



cosmos® Tilting Boiling Kettle

Type : Electrical Heating
Model : CGBT400 A
Tilting : Auto Tilting

SPECIFICATIONS

- ☑ Cooking Pan with 3 mm thick SS 304 and bottom side with DUMAT (SS-MS Compound bottom of 15mm thick).
- ☑ Easy to clean stick resistance cooking surface due to large-radius edges & corners.
- ☑ Inbuilt water spout, which helps in cooking and cleaning & is operated from the front control panel.

ELECTRICAL VERSIONS

- ☑ Heating by means of AISI 304 stainless steel heating elements engraved
- ☑ In bottom plate to give optimum & faster heat transfer.
- ☑ High accuracy German Thermostat for precise temperature Control.
- ☑ Safety sensor to Cut power supply once Pan is tilted.

ELECTRIC TILTING

- ☑ Smooth and easy tilting with help of Linear Actuator drive.
- ☑ Perfectly balance with pedestal bearings to accommodate loads.

TECHNICAL SPECIFICATIONS

Model	Capacity (ltr)	Electrical Specification	Pan Dimension (W x D x H)	Machine Dimesion (W x D x H)	Net Weight (Kg)
CEBT 400A	400	36 kW	1275 x 700 x 450mm	1930 x 1200 x 1000 mm	470 Kg

INSTALLATION PREREQUISITES








Drain Grating
1027x604x75



Soft Water
@10-50 ppm Hardness



Three Phase AC Supply

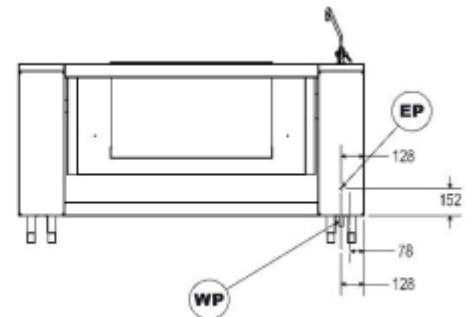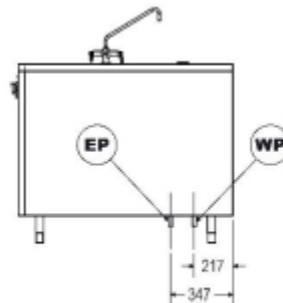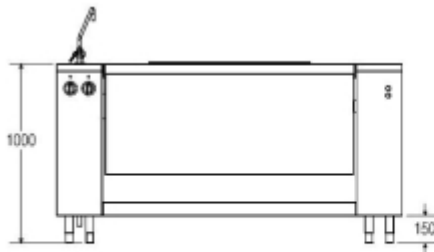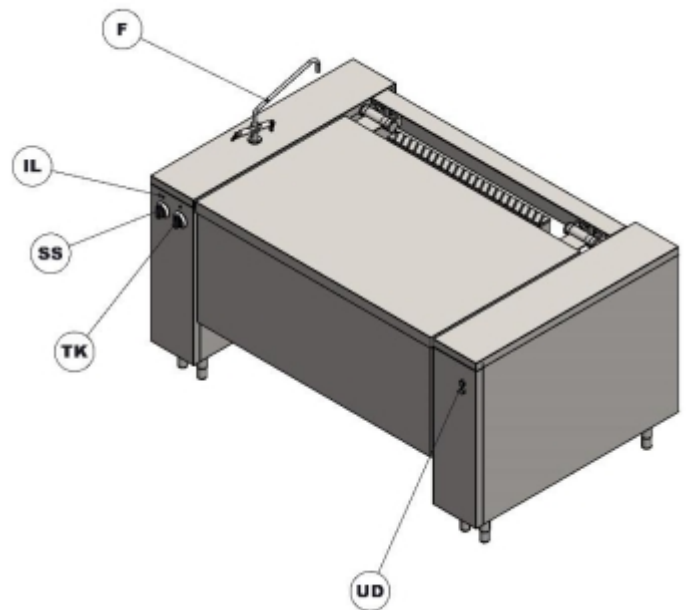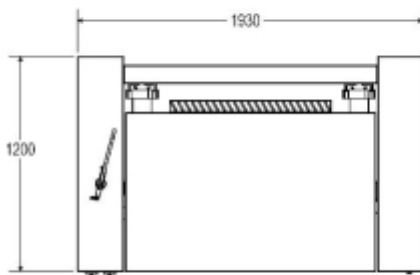

Legends

F :	Faucet	UD :	Up-Down Switch
IL :	Indication Light	EP :	Electrical Point
SS :	Selector Switch	WP:	Water Point
TK :	Thermostat Knob		

*All Dimensions are in mm.